



# LABEXIM PRODUCTS

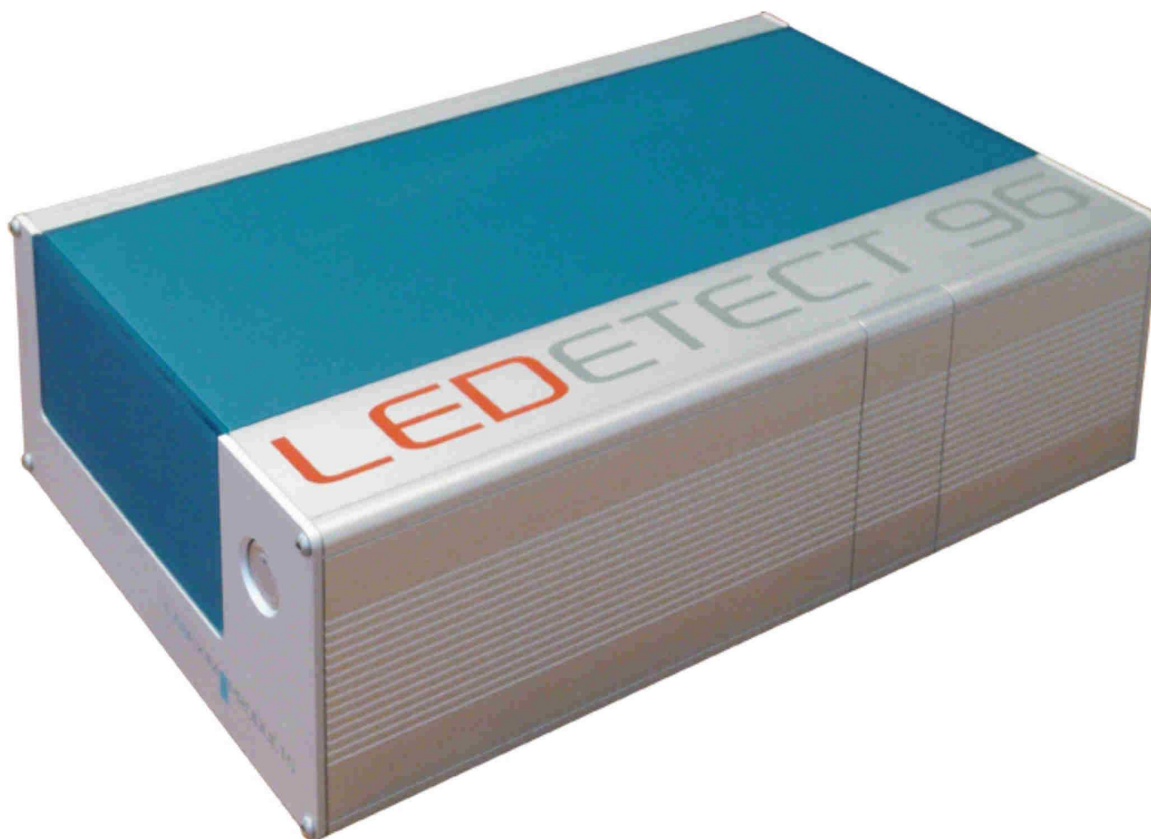


- LED Technology
- Low power consumption
- Automatic wavelength detection
- Intelligent LED-plugins
- No more lamp replacements
- UV ready (340nm) anytime
- MikroWin2000 - compliant

# LEDETECT 96

designed in Austria , manufactured in Germany

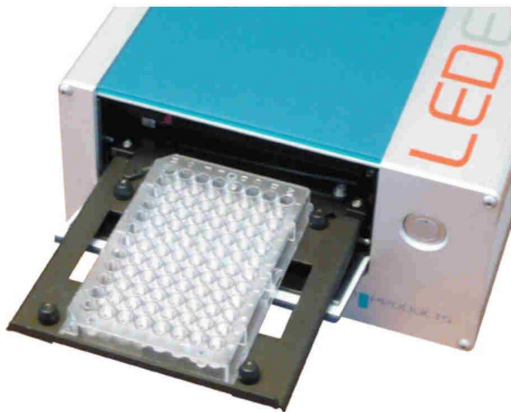

- ▶ LED technology
- ▶ Unrivaled optical performance
- ▶ intelligent LED-plugins
- ▶ UV ready (340nm)
- ▶ Easy and safe operation
- ▶ Computer controlled
- ▶ MikroWin2000 compliant



LEDETECT 96 is a computer controlled microplate reader for 96 well plates. Easy and safe operation take away the hassle from your daily microplate reading jobs. It is based on the most modern LED technology, no need to worry about lamp replacements anymore.

**LED Technology:** Instead of lamps and filters, LEDETECT 96 is fitted with up to 6 intelligent, wavelength specific LED-plugins (patent pending). Each plugin contains it's own digital ID, LED-light source, filter and lenses in one easily exchangeable component.

**Low power consumption:** In times like these, low power consumption must be a key issue with any electrical devices. With a maximum consumption of 12W during reading and a standby consumption of not more than 2W, LEDETECT 96 again is setting new standards.

**Unrivaled optical performance:** Using LED's as light source moves all those known problems with halogen lamps used in other readers to history. Modern LEDs are known for their high and extremely stable light energy paired with very low energy consumption at no heat development.

**Intelligent LED Plugins:** Adding new wavelengths (e.g. 340nm) or exchanging existing ones is as easy and safe as 1-2-3. Auto-recognition of the individual plugins takes away the worry about filter positions in the reader.

**Computer Controlled:** LEDETECT 96 is fully computer controlled. Capture 96 (included) allows to read plates and collect the raw OD data from the reader. With it's clipboard function, it allows to paste raw data into any spreadsheet program for further calculations.

**MikroWin2000 compliant:** In combination with MikroWin2000 data reduction software (optional), LEDETECT 96 adapts itself to any of your requirements for micropate based assays. Depending on your package selection, MikroWin2000 is the best choice for routine applications as well as extended screening, curvefit and kinetic studies.

All these great features combined in one product make LEDETECT 96 the next generation microplate reader of your choice!

Parameter	Value
Plate Types	96 well
Optical system	8 channel Transmission Photometer
Light source	Digital controlled LED lamps, wavelength specific
Photodetector	8 silicon Photodiodes
Wavelength range	340 - 750nm (special wavelengths up to 900nm)
Resolution	0.1 mOD (0.0001 OD)
Indication range	0.000 - 4.000 OD (Abs)
Accuracy	better than $\pm 1\%$ and $\pm 0.005$ OD up to 2.5 OD (any wavelength)
Linearity	$\leq \pm 0.5\%$ and $\pm 0.005$ OD from 0.1 to 1.5 OD (any wavelength) $\leq \pm 0.75\%$ from 1.5 to 2.5 OD (400nm – 750nm) $\leq \pm 0.75\%$ and $\pm 0.005$ OD from 0.1 to 2 OD (340-400 nm)
Reproducibility	better than $\leq \pm 0.3\%$ at 1OD (any wavelength) better than $\leq \pm 0.5\%$ at 2OD (400-750nm)
Measurement Mode	Single and dual wavelength, Linear scan (30 points/well) for agglutination etc.
Reading speed	5 seconds (kinetic interval, single wavelength) 10 seconds (96 well, dual wavelength)
Wavelengths	4 wavelengths onboard (405, 450, 492, 620nm) up to 6 possible (340 – 750)
Shaking	4 speeds
PC-Interface	USB 2.0 (USB 1.1 compatible)
PC Software	Capture96 included MikroWin2000 testversion included
Dimensions	23cm x 12cm x 36cm (W x H x L)
Weight	6.7 kg net
Housing	Anodized Aluminium
Power Supply	external power adapter 100-240V, 50 or 60 Hz (autosensing), 24VDC, 2.5A (approved to EN 60601-1-2, EN 61000-6-3, EN 61000-6-1, EN 60601-1, EN 60950)
Scope of Supply	Power adapter , USB Cable, 4 Standard Filters, User manual (CD), Capture96 Control Software, MikroWin2000 Connect (demo version)
Ordering information	WR-302-02 Ledetect96 Microplate Reader WR-302-xxx LED plugin (xxx = wavalength in nm) WR-302-03 MikroWin2000 Lite WR-302-04 Mikrowin2000 Screening & Curvefit

